


RCCN 日成CE型闭端端子 Close-End Wire Connector



外壳材质: UL合格之NYLON66(本色), 防火等级: 94V-2.

用途: 日成闭端端子适用于电机、电器中电线接点用。灯饰等制品优良耐热接线器。
用法: 使用时先将电线尾部外皮剥去, 然后再插入端子中, 用夹线工具日成YYT-1压着即可。

特点: 外壳为尼龙成型, 内部管特长, 增加电线压接范围使更良于导电, 并更能夹住电线, 即使强烈振动亦不脱落。

*Four models cover a wide range of wire combinations from 22 AWG strands through 10 AWG stranded.

*Compact design fits easily into tight locations.

*Flared skirt ensures easy wire entry and protects against turned-back strands.

*UL Listed for 300V maximum building wiring; temperature rated at 105°C (221°F) maximum.

*P/N with postfix V0 means the shell is UL 94V-0 flame-retardant. Wire Connectors & Terminals Wire Connectors

*P/N with postfix "-L" means the tube is made of aluminum.

*Material: UL approved 94V-2 Polyamide 6.6, copper tube or aluminum tube.



单位/Unit:mm



默认型号/铝 Item No.	型号/铜 Item No.	长度 L	高度 H	金属内径 A	宽 B	适用电线范围 Suitable Wires			包装 Packing
						平方线 Square cable mm ²	AWG	股线/Strang	
CE-1		7.5	18.0	2.6	6.2	1.25	22-18	最小2条#22线 Min. 2 pcs of #22 cable 最大2条#18线 Max. 2 pcs of #18 cable	1000pcs
CE-2	CE-2铜	7.5	19.7	3.0	7.9	2.0	22-14	最小2条#18线 Min. 2 pcs of #18 cable 最大3条#18线 Max. 3 pcs of #18 cable	
CE-5	CE-5铜	8.5	25.5	4.0	10.5	5.5	22-10	最小2条#18线 Min. 2 pcs of #18 cable 最大2条#16线 Max. 2 pcs of #16 cable	500pcs
CE-8	CE-8铜	9.5	27.7	5.3	12.4	8	16-10	最小2条#16线 Min. 2 pcs of #16 cable 最大3条#16线 Max. 3 pcs of #16 cable	

AWG与&mm ²	AWG	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32
(平方数)对照表 (square data) referred sheet	mm ²	33.4	20.8	13.2	8.4	5.3	3.3	2.1	1.3	0.83	0.52	0.33	0.21	0.13	0.08	0.05	0.03

RCCN 日成CEV0型耐高温阻燃闭端端子 CEV0 Heat Resistant Wire Connector

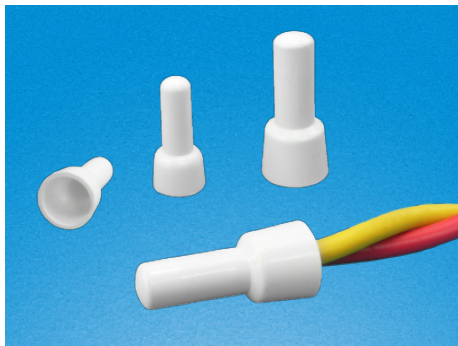

外壳材质: UL合格之NYLON66(本色).

防火等级: 94V-0阻燃。

温度范围: 150

用途: 日成闭端端子适用于电机、电器中电线接点用。灯饰等制品优良耐热接线器。
用法: 使用时先将电线尾部外皮剥去, 然后再插入端子中, 用夹线工具日成YYT-1压着即可。

特点: 外壳为尼龙成型, 内部管特长, 增加电线压接范围使更良于导电, 并更能夹住电线, 即使强烈振动亦不脱落。

另备铜管型号 例: CE-2V0铜

*Four models cover a wide range of wire combinations from 22 AWG strands through 10 AWG stranded.

*Compact design fits easily into tight locations.

*Flared skirt ensures easy wire entry and protects against turned-back strands.

*UL Listed for 300V maximum building wiring; temperature rated at 105°C (221°F) maximum.

*P/N with postfix V0 means the shell is UL 94V-0 flame-retardant. Wire Connectors & Terminals Wire Connectors.

*P/N with postfix "-L" means the tube is made of aluminum.

*Material: UL approved 94V-2 Polyamide 6.6, copper tube or aluminum tube.

单位/Unit:mm

型号 Item No.	长度 L	高度 H	金属内径 A	宽 B	适用电线范围 Suitable Wires			包装 Packing
					平方线 Square cable mm ²	AWG	股线/Strang	
CE-2V0	7.5	19.7	3.0	7.9	2.0	22-14	最小2条#18线 Min. 2 pcs of #18 cable 最大3条#18线 Max. 3 pcs of #18 cable	1000pcs
CE-5V0	8.5	25.5	4.0	10.5	5.5	22-10	最小2条#18线 Min. 2 pcs of #18 cable 最大2条#16线 Max. 2 pcs of #16 cable	500pcs